

# SB-25E

*Minimal Beam  
Deflection*

*Rebuilt to your  
budget*

*Upgraded  
Electronics  
Package*

*7" Touchscreen*

*Enhanced  
Safety System*

For Sales & Service  
Contact:











# SB-25E

The SB-25E is an original SB-25 rebuilt to your budget by skilled ENTAKT technicians. A new ENTAKT designed electrical control system is added to all machines to improve the reliability, safety and ease of use.

A 7" HMI touchscreen provides simplified operator controls for setting die height and daylight. A protected technician's screen provides access to testing various functions of the machine.

The USM/SAMCO SB series are noted for their robust swing beams mounted on a stationary column by two special bushes. This produces minimal deflection of the swing beam during cutting and permits easy, fast and accurate beam positioning due to low swing force requirements

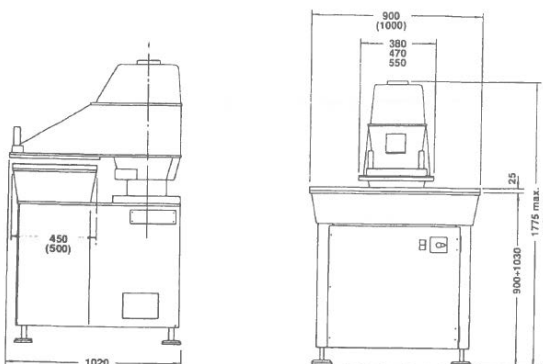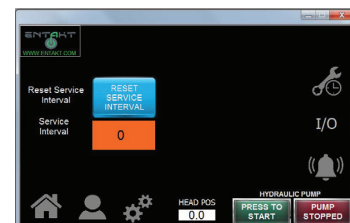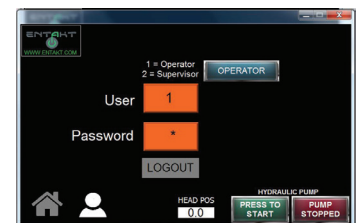

**Cutting Force:** 25 Tons  
**Bed Size:** 39.5" x 20"  
**Swing Beam Width:** 21.5"  
**Working Height:** 39.5"  
**Cutting Stroke Maximum:** 6.0"  
**Cutting Stroke Minimum:** 0.3"  
**Daylight (without cutting pad)**  
**Maximum:** 7.0"  
**Minimum:** 1.2"  
**Electrical Supply:** 220V/3ph/60cycle  
**Oil:** 12 Gal (46 wgt)

**Weight (without oil):** 1763 lbs  
**On Pallet:**  
**Height:** 69"  
**Width:** 43.5"  
**Depth:** 45.5"  
**Weight of Pallet:** 200lbs

**ENTAKT**

This company reserves the right to supply products that may differ slightly from those described in this publication.

68 New Hampshire Ave Portsmouth, NH 03801

T: +1 (603) 570-4095 F: +1 (844) 447-7866

[www.entakt.com](http://www.entakt.com)